

# Conbextra GP5

(formerly known as Conbextra UHS90)



constructive solutions

## Non-shrink, free flow, ultra high strength cementitious precision grout.

### Uses

Conbextra GP5 is used for precision grouting of heavy duty load bearing units, where high static and dynamic load occurs. Typical applications would be grouting of base plates and bolt pockets of turbines, compressors, boiler feed pumps, diesel generating sets, crane and transport rails, heavy reciprocating equipments, pulverising mills, metal shearing and processing machines, steel rolling mill beds, cement, granite, textile and paper plant machinery, bridge bearing pedestal applications & other critical applications.

### Advantages

- Dual shrinkage compensation.
- No metallic iron content to cause staining.
- Pre-packed material overcomes onsite batching variations.
- Develops high early & ultimate strength without the use of chlorides and ensures durability of the hardened grout.
- Free flow characteristics without any segregation and bleeding ensures high level of contact with load bearing area.

### Standard Compliance

Conbextra GP5 conforms to ASTM C1107 (Standard Specification for Packaged Dry, Hydraulic-Cement Grout) (Non-shrink).

### Description

Conbextra GP5 is supplied as a ready to use dry powder. The addition of a controlled amount of clean water produces a free flowing, non-shrink grout for gap thicknesses up to 150mm.

Conbextra GP5 is a blend of Portland cement, graded fillers and chemical additives which impart controlled expansion in the plastic state whilst minimising water demand. The low water demand ensures high early strength. The graded fillers are designed to assist uniform mixing and produce a consistent grout. On setting, will have microcellular structure with high frost, fire and oil resistance.

### Technical support

An experienced technical advisory team is available to give technical service on request.

### Properties

Compressive strength (N/mm<sup>2</sup>)

Cube size : 50mm (ASTM C 109) & 70.6mm (IS 4031 part 6)

W/P ratio	0.12
Age	Flowable
	(W/P - 0.12)
12 hrs	15
16 hrs	30
1 day	40
3 days	60
7 days	70
28 days	90
Flexural Strength (BS 6319 - 3)	
Age (days)	Flexural strength (N/mm <sup>2</sup> ) (W/P 0.12)
28	> 11
Tensile strength ((BS 6319 - 7) (W/P - 0.12)	> 6 N/mm <sup>2</sup> @ 28 days
Freshwet density	Approx. 2400 kg/m <sup>3</sup> depending on actual consistency used
Young's modulus (ASTM D469)	28 KN/mm <sup>2</sup>
Dynamic load resistance	Specimen of Conbextra GP5 remained undamaged even after subjecting them to alternate loads of 5N/mm <sup>2</sup> & 25N/mm <sup>2</sup> at the rate of 500 cycles/minute for two million cycles.
Coefficient of thermal expansion	11 x 10 <sup>-6</sup> /°C
Unrestrained expansion	0 - 2 % in the plastic state enables to overcome shrinkage.
Hardened expansion	0 - 0.3%

Flow Characteristics: The max. distance of flow is governed by the gap width and the head of the grout. Typical data for flow design assuming grout is poured immediately after mixing is given in the table below:

Grout consistency	Max. flow distance in mm			
	Gap width (mm)	50mm head	100mm head	250mm head
Flowable	30	350	1000	1500
	40	500	1500	2000
	50	900	2000	3000+

**Note 1:** This table is based on the following factors:

1. Temperature : 30°C
2. Water saturated substrate.
3. Minimum unrestricted flow width is 300mm.

**Note 2:** The typical physical properties given above are derived from testing in a controlled laboratory environment. Results derived from testing field-applied samples may vary, dependent on actual site conditions.

# Conbextra GP5

(formerly known as Conbextra UHS90)

## Specification Clauses

### Performance specification

All grouting shown on the drawing must be carried out with a pre packed cementitious based product with negligible chloride content.

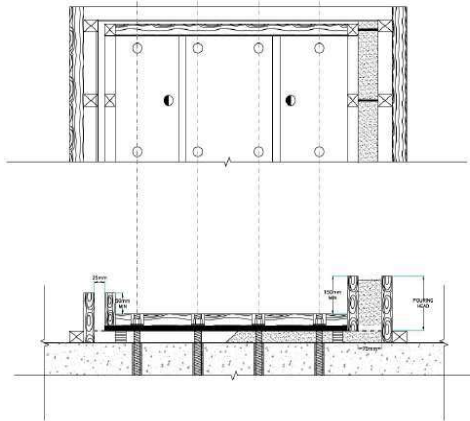


Fig.1: Typical detail of stanchion base plate

It shall be mixed with clean water to the required consistency. The grout must not bleed or segregate.

A positive volumetric expansion shall occur while the grout is plastic and hardened state by means of gaseous system.

The compressive strength of the grout must exceed 65 N/mm<sup>2</sup> at 7 days and 85 N/mm<sup>2</sup> at 28 days.

The flexural strength of grout must exceed 10 N/mm<sup>2</sup> @ 28 days. The fresh wet density of the mixed grout must exceed 2350 kg/m<sup>3</sup>.

The storage, handling and placement of the grout must be in strict accordance with the manufacturer's instructions.

### Application instructions

#### Preparation

##### Foundation surface

The substrate surface must be free from oil, grease or any loosely adherent material. If the concrete surface is defective or has laitence, it must be cut back to a sound base. Bolt holes and fixing pockets must be blown clean of any dirt or debris.

##### Pre-soaking

Several hours prior to placing, the concrete substrates should be saturated with fresh water.

Immediately before grouting takes place any free water should be removed with particular care being taken to blow out all bolt holes and pockets.

### Base plate

It is essential that this is clean and free from oil, grease or scale. Air pressure relief holes should be provided to allow venting of any isolated high spots.

### Levelling shims

If these are to be removed after the grout has hardened, they should be treated with a thin layer of grease.

### Formwork

The formwork should be constructed to be leakproof. This can be achieved by using foam rubber strip or mastic sealant beneath the constructed formwork and between joints.

In some cases it is practical to use a sacrificial semi-dry sand and cement formwork. The formwork should include outlets for pre-soaking.

### Unrestrained surface area

This must be kept to a minimum. Generally the gap width between the perimeter formwork and the plate edge should not exceed 150mm on the pouring side and 50mm on the opposite side. It is advisable, where practical, to have no gap at the flank sides.

### Mixing and placing

#### Mixing

For best results a mechanically powered grout mixer should be used. When quantities up to 50kg are used, a heavy duty slow speed drill (400-500 rpm) fitted with a paddle is suitable. Larger quantities will require a heavy duty mixer.

To enable the grouting operation to be carried out continuously, it is essential that sufficient mixing capacity and labour are available. The use of a grout holding tank with provision to gently agitate the grout may be required.

#### Consistency of grout mix

The quantity of clean water required to be added to a 25kg bag to achieve the desired consistency is given below :

Flowable : 3.0 litres

The selected water content should be accurately measured into the mixer. The total content of the Conbextra GP5 bag should be slowly added and continuous mixing should take place for 5 minutes. This will ensure that the grout has a smooth even consistency.

#### Placing

At 30°C place the grout within 20 minutes of mixing to gain full benefit of the expansion process.



# Conbextra GP5

(formerly known as Conbextra UHS90)

Conbextra GP5 can be placed in thicknesses up to 100mm in a single pour when used as an underplate grout.

For thicker sections it is necessary to fill out Conbextra GP5 with well graded silt free aggregate to minimise heat build up. Typically a 10mm aggregate is suitable. 50 - 100% aggregate by weight of Conbextra GP5 can be added.

Any bolt pockets must be grouted prior to grouting between the substrate and the base plate.

Continuous grout flow is essential. Sufficient grout must be prepared before starting. The time taken to pour a batch must be regulated to the time to prepare the next one.

**Removable hopper** : For large pours the grout may be hand placed or pumped into a removable hopper ( trough).

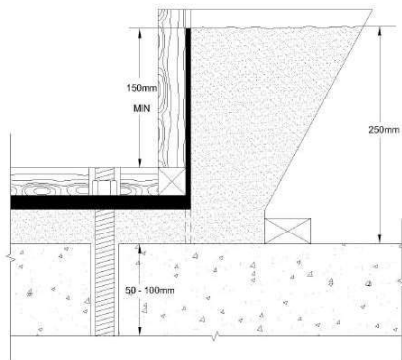
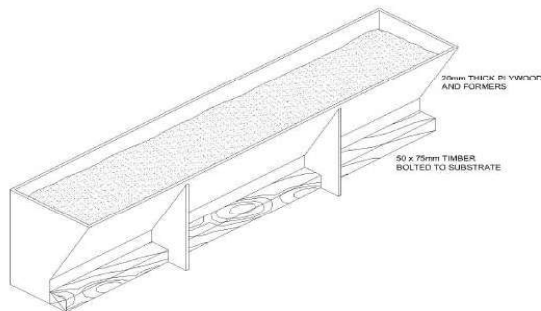


Fig.2 : Typical hopper system

Pouring should be from one side of the void to eliminate any air or presoaked water becoming trapped under the base plate. It is advisable to pour the grout across the shortest distance of travel. The grout head must be maintained at all times so that a continuous grout front is achieved.

Where large volumes have to be placed Conbextra GP5 may be pumped. A heavy duty diaphragm pump is recommended for this purpose. Screw feed and piston pumps may also be suitable.

## Curing

On completion of the grouting operation, exposed areas should be thoroughly cured. This should be done by the use of Concure WB curing membrane, continuous application of water and/or wet hessian.

## Limitations

### Low temperature working

When the air or contact surface temperatures are 10°C or below on a falling thermometer, warm water ( 30 - 40°C) is recommended to accelerate strength development.

For ambient temperature below 10°C the formwork should be kept in place for at least 36 hours.

Normal precautions for winter working with cementitious materials should then be adopted.

### High temperature working

At ambient temperatures above 40°C, cool water ( below 20°C) should be used for mixing the grout prior to placement.

## Estimating

### Packaging

Conbextra GP5 is supplied in 25 kg moisture resistant bags.

### Yield

Allowance should be made for wastage when estimating quantities required. The approximate yield per 25 kg bag for different consistency is :

Consistency	Flowable
Yield ( litres)	11.5

## Storage

### Shelf life

Conbextra GP5 has a shelf life of 6 months if kept in a dry store in sealed bags. If stored in high temperature and high humidity locations, the shelf life may be reduced.

# Conbextra GP5

(formerly known as Conbextra UHS90)

## Precautions

### Health and Safety instructions

Conbextra GP5 is alkaline and should not come into contact with skin and eyes. Inhalation of dust during mixing should be avoided.

Gloves, goggles and dust mask should be worn.

If contact with skin occurs, it shall be washed with water. Splashes to eyes should be washed immediately with plenty of clean water and medical advice sought.

### Fire

Conbextra GP5 is non flammable.

### Additional information

Fosroc manufactures a wide range of products specifically designed for the repair and refurbishment of damaged reinforced concrete. This includes repair mortars, fluid microconcretes, chemical resistant epoxy mortars in addition to comprehensive package of protective coatings. In addition, a wide range of complementary products are available. This includes joint sealants, waterproofing membranes, grouts and anchors and specialised flooring materials.

\*Separate data sheets are available on these products.



## Fosroc Chemicals (India) Pvt. Ltd.

### Head Office

Embassy Point, No. 150,  
2nd Floor, Infantry Road,  
Bangalore 560 001,  
Karnataka

### Important note :

Fosroc products are guaranteed against defective materials and manufacture and are sold subject to its standard terms and conditions of sale, copies of which may be obtained on request. Whilst Fosroc endeavours to ensure that any advice, recommendation, specification or information it may give is accurate and correct, it cannot, because it has no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products whether or not in accordance with any advice, specification, recommendation or information given by it.

### telephone

+91 80-42521900

### fax

+91 80-22281510

### e-mail

enquiry.india@fosroc.com

### Regional Offices

#### Chennai

Hills Centre, Old No 5,  
New No 9, 3rd Cross Street,  
Jeth Nagar, Raja Annamalaipuram,  
Chennai 600 028.  
Ph: 9500064795

#### Mumbai

MBC Park, 12th floor, Office No.12B,  
'D' Block, Near G Corp/Hyper City  
Kasarwadawali, Ghodbunder Road,  
Thane (West) 400 615  
Ph: +91 22 6229 6800

#### Noida

Unit No. 601, Highway Tower-II  
A-13/2, 6th Floor, Sector-62  
Gautam Buddha Nagar,  
Noida 201 309, Uttar Pradesh  
Ph: +91 120 6121900  
Fax: 0120-4270622

#### Kolkata

304, Jodhpur Park  
Kolkata 700 068  
Ph: +91 33-65343188  
Fax: 033-2499-0278

[www.fosroc.com](http://www.fosroc.com)